

RS 10-1 L



Clean-cut design, ideal for corridors, halls or stairwells.

Whether as ceiling or wall light, elegant, hand-blown glass shades create a warm, even light.

This is how they work

- Invisibly concealed inside, cutting-edge high-frequency sensor technology responds to the slightest movement irrespective of temperature, instantly switching the light "ON" and, after a programmable time, "OFF" again.

Settings

- Infinitely variable, electronic reach adjustment from 1 – 8 meters in diameter.
- Control dials for easy adjustment of light 'on' duration and twilight threshold.

Installation advantages

- Straightforward installation (light and sensor = 1 connection)
- Facility for connecting additional loads (e.g. bathroom/WC extractor fan)
- Bulb can be changed without the need for tools as the glass shade is held in place by a screwless bayonet fitting.

Material

- High-quality finish
- White, hand-blown Topal glass shade
- Base in high-quality die-cast aluminum or high-quality plastic (RS 16 L)

Main features of SensorLights



Easily mounted to walls or ceilings



Twilight setting




Time setting



Reach setting

Detection zone for wall and ceiling mounting

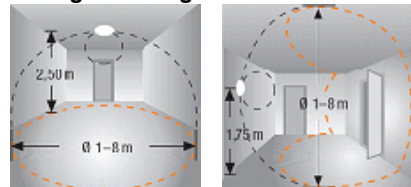

The 360° detection zone with an aperture angle of 160° and reach of up to 8 m reliably watches over rooms as large as 50 m².

RS 10-1 L

Prod. No.

730512

Dimensions (h x w x d)

280 dia. x 110 mm

Output max.

75 W / E 27 + 800 W max./ e.g. bathroom/ WC extractor fan

Transmission power

approx. 1 mW

HF-System

5.8 GHz

Voltage

230 – 240 V/50 Hz

Angle of coverage

360° with 160° aperture angle, also through glass, wood and stud walls

Reach

1 – 8 m dia., infinitely variable

Twilight setting

2 – 2000 lux

Time setting

5 sec. – 15 min.

Enclosure

IP 44

Protection class

II

Subject to technical modifications