

## RS 10-3 L



Prod. No. **st. steel effect 735715**



Prod. No. **white 731410**

**Clean-cut design, ideal for corridors, halls or stairwells.**

Whether as ceiling or wall light, elegant, hand-blown glass shades create a warm, even light.

### This is how they work

- Invisibly concealed inside, cutting-edge high-frequency sensor technology responds to the slightest movement irrespective of temperature, instantly switching the light "ON" and, after a programmable time, "OFF" again.

### Settings

- Infinitely variable, electronic reach adjustment from 1 – 8 meters in diameter.
- Control dials for easy adjustment of light 'on' duration and twilight threshold.

### Installation advantages

- Straightforward installation (light and sensor = 1 connection)
- Facility for connecting additional loads (e.g. bathroom/WC extractor fan)
- Bulb can be changed without the need for tools as the glass shade is held in place by a screwless bayonet fitting.

### Material

- High-quality finish
- White, hand-blown Topal glass shade
- Base in high-quality die-cast aluminum or high-quality plastic (RS 16 L)

### Main features of SensorLights



Easily mounted to walls or ceilings



Twilight setting




Time setting



Reach setting

### Detection zone for wall and ceiling mounting

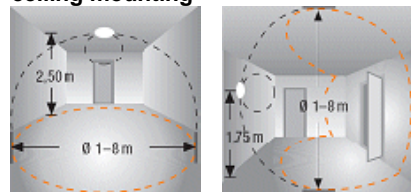

The 360° detection zone with an aperture angle of 160° and reach of up to 8 m reliably watches over rooms as large as 50 m<sup>2</sup>.

## RS 10-3 L

(Prod. No. **st. steel effect 735715**, Prod. No. **white 731410**)

Dimensions (h x w x d)	360 mm dia. x 110 mm
Output	75 W max. / E 27 + 800 W max. / e.g. bathroom/WC extractor fan
Transmission power	approx. 1 mW
HF-System	5.8 GHz
Voltage	230 – 240 V/50 Hz
Angle of coverage	360° with 160° aperture angle, also through glass, wood and stud walls
Reach	1 – 8 m dia., infinitely variable
Twilight setting	2 – 2000 lux
Time setting	5 sec. – 15 min.
Enclosure	IP 44
Protection class	II
	Subject to technical modifications