

# IS 1 Action



Prod. No. **white 600310**



Prod. No. **black 600419**

## Costs less than most people think.

Perfected technology and up market design needn't cost a fortune. The latest case in point: The IS 1 provides outstanding value for money that more than meets the challenges in this segment.


## Settings

- The tilting and swiveling sensor lens permits exact adjustment of the detection zone to suit individual requirements.
- Light 'ON' time and twilight threshold are easily set by control dial.

## Installation advantages

- Clearly designed terminal compartment for fast, easy wiring.
- Suitable for mounting on walls or ceilings
- Turns in two directions

## Main features at a glance

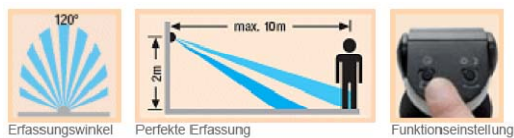

Erfassungswinkel  
120°

Perfekte Erfassung

Funktionseinstellung



180° vertikal

± 30° horizontal

Reduzierung des  
Erfassungswinkels

## Technical Data IS 1 Action

(Prod. No. **white 600310**, Prod. No.. **black 600419**)

Dimensions (hxwxd)	50 x 80 x 120 mm
Output / light bulb	500 W max. (resistive load, e.g. filament bulb) 500 W max. (uncorrected, inductive, $\cos \phi = 0.5$ ) 500 W max. (electronic ballasts, capacitive, e.g. low-energy lamp, 4 units max.)
Voltage	230 – 240 V / 50 Hz
Angle of coverage	120°
Reach	10 m max.
Twilight setting	2 – 2000 lux
Time setting	8 sec. – 35 min.
Enclosure	IP 54
Protection class	II
Adjustment range	30° horizontally, 180° vertically



ceiling



wall