

L 115 S



▪ Mundgeblasenes
Kristallglas



Prod. No. silver **657512**



Prod. No. white **657413**


All-round perfection: Simple elegance with clever, practical functions.

The design element that gives this SensorLight its unique look is the interesting effect of the crystal clear glass shade. The multilens visible at the base blends harmoniously into the design and is the external mark of a highly sensitive interior.

Possible applications

- Watt-o-matic allows basic brightness to be adjusted from 0 to 50%. When movement is detected, the light switches from courtesy mode of basic brightness to full output.
- Tilting and swivelling multi-lens for exact adjustment to the specific situation.
- Easy adjustments of light "ON" time and twilight thresholds by control dial.

Main features at a glance

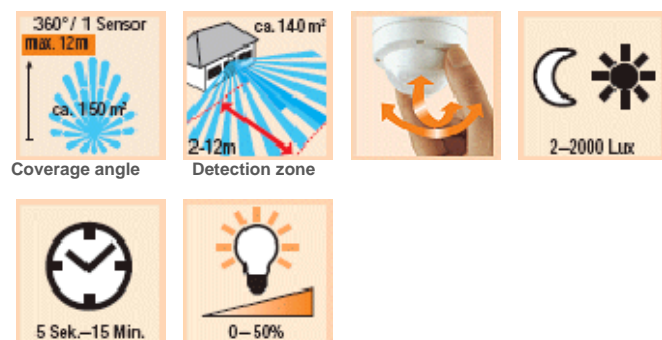

L 115 S

(Prod. No. silver **657512**, Prod. No. white **657413**)

Dimensions (h x w x d)	330 x 215 x 257 mm
Output / light bulb	60 W max. / E 27 (no low-energy bulb)
Voltage	30 – 240 V, 50 Hz
Angle of coverage	360° with 120° angle of aperture
Reach	12 m max.
Twilight setting	2 - 2000 lux
Time setting	10 sec. – 15 min.
Brightness control	0 – 50% (Watt-o-matic)
Enclosure	IP 44
Protection class	II
	Subject to technical modifications