

## L 190 S



Prod. No. **black 644413**



Prod. No. **white 644512**

**Exclusive SensorLights in classic lantern design for prestigious exteriors.**

High-quality stainless steel (170/180- series) or long-life, intricately ornamented die-cast aluminum (190- series) combined with uncompromising STEINEL multi-sensor technology.


### This is how it works

- Integrated soft light start
- Basic brightness can be adjusted from 0 – 50% (Watt-o-matic). When movement is detected, the light switches to full power for the time selected.
- Manual override (4h) at power switch.

### Settings

- Reach can be set to a maximum of 12 m or 5 m by turning the multi-lens.
- Detection zone can be limited by fitting the shrouds supplied.
- Comfort function buttons for precision adjustment of light "ON" time, twilight threshold and brightness.

### Main features at a glance

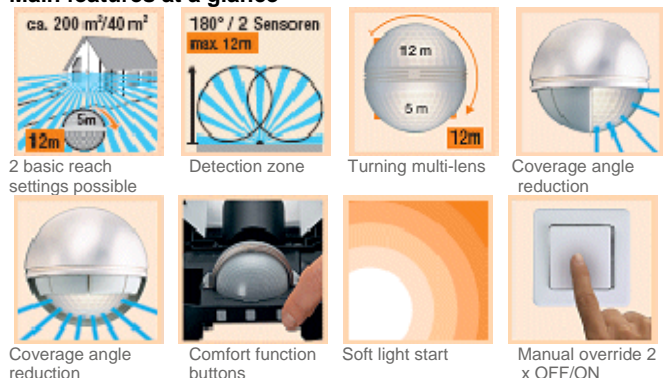

## L 190 S

(Prod. No. **black 644413**, Prod. No. **white 644512**)

Dimensions (h x w x d)	335 x 217 x 147 mm
Output	100 W max. / E 27 (no low-energy bulb)
Voltage	230 – 240 V / 50 Hz
Angle of coverage	180° with 90° angle of aperture
Reach	12 m max. or 5 m (temperature-stabilized)
Twilight setting	2 – 2000 lux
Time setting	5 sec. – 15 min.
Brightness control	0 – 50 % (Watt-o-matic)
Manual override	4 hrs. selectable
Enclosure	IP 44
Protection class	II
	Subject to technical modifications