

L 863 S



House number lights with decorative panels high-quality stainless steel. The hand-blown glass shades provide soft light distribution, impressively setting off entrance areas.

This is how it works

- Basic brightness can be adjusted from 0 – 50% (Watt-o-matic).
- The integrated soft light start feature creates a pleasant lighting effect and prolongs the life of the bulb by gradually increasing brightness to full output over a period of one second when the light is switched "ON". The electronics are equally as gentle on the light when it is switched "OFF" (L 863 S).
- Manual over ride (4h) at power switch (L 863 S).

Settings

- Reach can be set to a maximum of 12 m or 5 m by turning the multi-lens.
- Detection zone can be limited by fitting the shrouds supplied.
- Light "ON" time and twilight threshold easily adjusted using comfort function buttons (L 863 S) or control dial (L 850 S).
- Designer-style decorative panel in stainless steel
- Soft light start
- Manual override (4 hrs. selectable)
- Hand-blown Triopal glass shade


Installation advantages

- Supplied with self-adhesive numbers for use as house number light.
- Bulb can be changed without tools thanks to glass shade with eccentric fitting.

Brightness control (Watt-o-matic)

STEINEL Watt-o-matic permits permanent illumination at night with a basic brightness that can be adjusted to between 0 and 50% to suit individual requirements. The sensor light then shows the way even when there's no-one in the detection zone. The Wattomatic is ideal for house number lights: the dimmed light makes the house number easy to read at all times. As soon as anybody enters the detection zone, the electronics switch to full output for the period set on the timer.

Main features at a glance

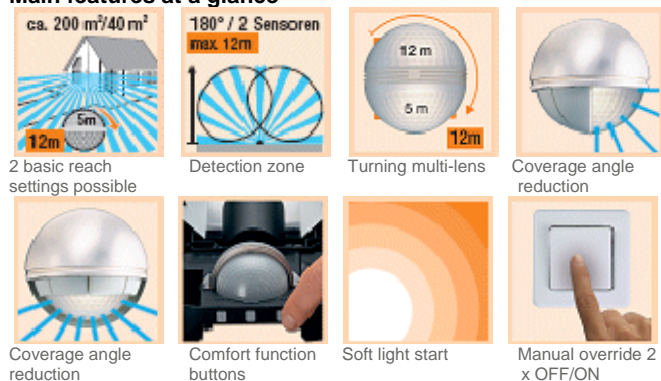

L 863 S

stainless steel decorative panel Prod. No. 643614

Dimensions (h x w x d)	330 x 209 x 98 mm
Output	100 W max. / E 27 (no low-energy bulb)
Voltage	230 – 240 V / 50 Hz
Angle of coverage	180° with 90° angle of aperture
Reach	2 basic settings: 12 m max. or 5 m (temperature-stabilized)
Twilight setting	2 – 2000 lux
Time setting	5 sec. – 15 min.
Brightness control	0 – 50 % (Watt-o-matic)
Manual override	4 hrs. selectable
Enclosure	IP 44
Protection class	II
Accessories	Including sheet of self-adhesive house numbers Subject to technical modifications